



CANADIAN MOSS SOLUTIONS INC.




CC-80/90/140/150-IND

PRODUCT DATA SHEET

Canadian Moss Solutions' contact chambers are specially designed to house ProMoss™

- 2" and 50 mm PVC Connections available
- In line flow meter (0 - 20 gpm) and 2 shut off valves (for inflow and outflow) required and are NOT included
- Automatic air relief may be preferred by operators, not included
- Hard piping required for installation
- **Drain size:** ¾" on 50 psi contact chamber, 1 ½" on 75 psi contact chamber
- **Flow rate:** 15 gpm, ideal
- **Max operating pressure:** 50psi or 75 psi (see operating limitations label on contact chamber)
- **Max operating temperature:** 120°F

Dimensions (inches)				
	CC-80-IND	CC-90-IND	CC-140-IND	CC-150-IND
A	32.70	37.59	40.06	45.50
B	21.72	27.72	34.22	39.59
C	9.25	11.63	14.09	15.62
D	17.25	19.63	22.09	23.62
E	8.00	8.00	8.00	8.00
F	18.64	24.64	31.14	36.50
ProMoss™ 3 Capacity				
# bags	3	6	12	16

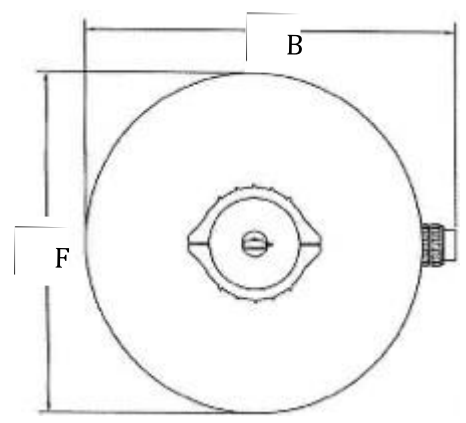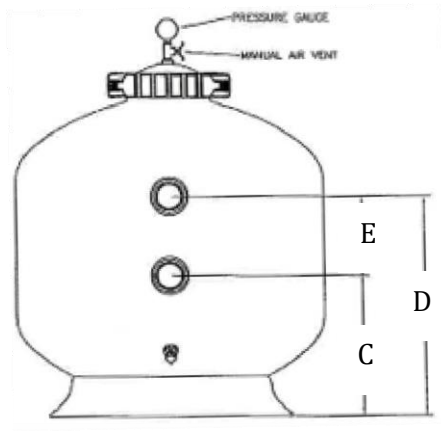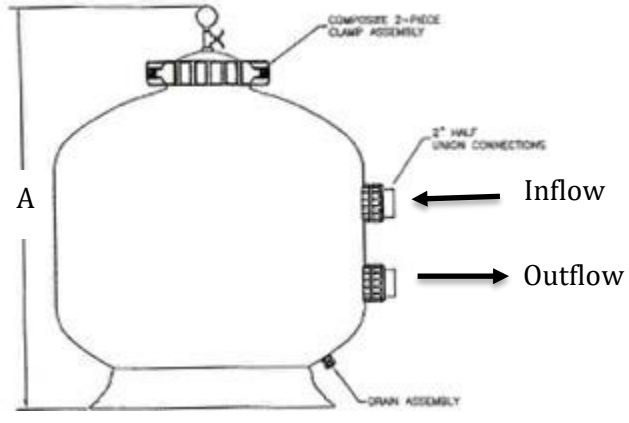

CANADIAN MOSS SOLUTIONS INC.

Contact Information

Canadian Moss Solutions

24 Bould Blvd Stony Plain

AB T7Z 1V7

Phone (780) 913-4817

Office (780) 860-4022

marc@canmoss.ca

www.canadianmosssolutions.ca